



LOGIC CODE COMBI ES.

26 33 38

HIGH EFFICIENCY COMBINATION BOILERS.

Designed to take the headache out of meeting Building Regulations, the Logic Code Combi ES from Ideal is a simple one-box solution, capable of supporting up to level 4 of the Code for Sustainable homes.



LOGIC CODE COMBI ES

- Complete range of Logic combination boilers for social new build developers
- Achieves optimum SAP and DER ratings for standard combination boiler usage
- Higher DHW flow rates than standard boiler - approximately 10% increase

RELIABLE

- Energy Saving Trust endorsed product
- Flexible warranty
- High DHW efficiency - reduced running costs
- Less waste DHW water as DHW inlet is preheated
- Reduced plumbing on DHW

EASY TO INSTALL

- One single appliance to install - quick and easy
- Built-in pipework; no extra space at the side of the product needed
- Standard combination connections
- No additional maintenance requirement
- Compact and light solution for social new build or retrofit installations



Compact



LPG Conversion Kit*



Frost Protection



Flue Variants



NOx Class 5




Ideal Boilers
PO Box 103, National Avenue
Kingston upon Hull
East Yorkshire, HU5 4JN

T: 01482 492251
ideal@idealboilers.com
WWW.IDEALBOILERS.COM

* Available with 38 kW model.

CLEARANCES & DIMENSIONS.

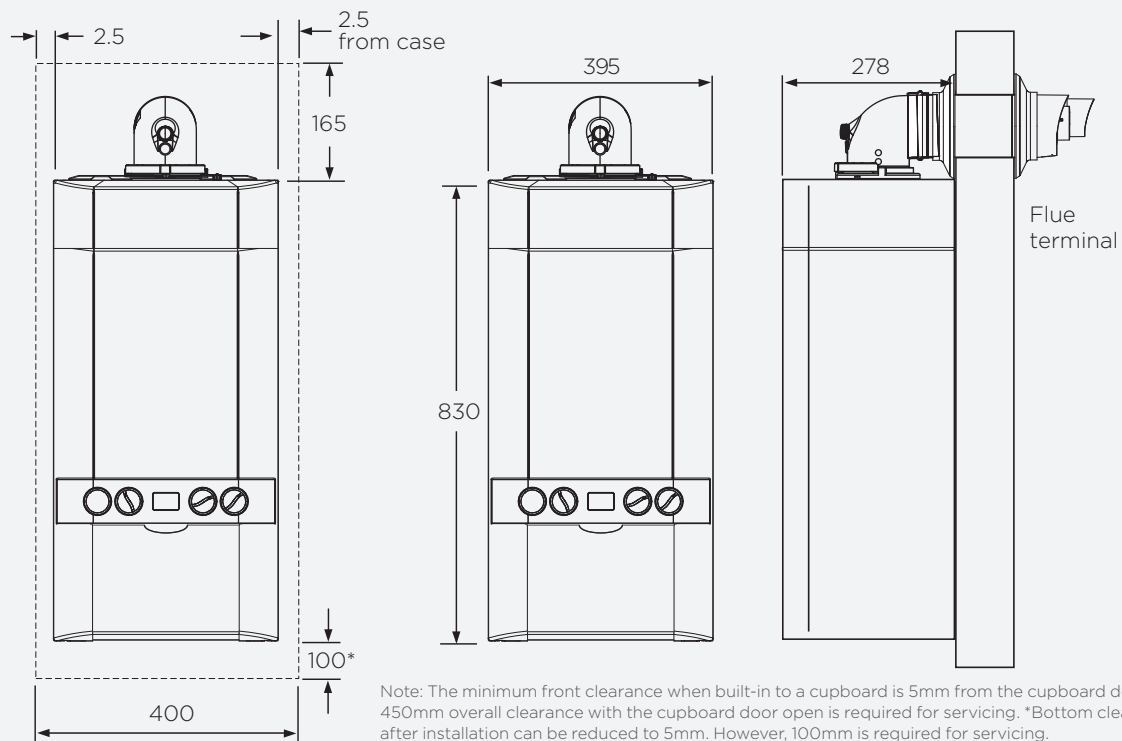

FLUE LENGTHS.

	CODE COMBI ES 26	CODE COMBI ES 33	CODE COMBI ES 38
Max horizontal**	9m	8m	6m
Max vertical**		7.5m	
Powered vertical†		22m	

Available kits: high level flue outlet kit.
 ** Each 90° elbow used is at the expense of 1000mm of straight flue run, and each 45° elbow is used at the expense of 600mm of straight flue run.
 † Typical combined primary and secondary length. See installation instructions for more details. Note: The Flue Deflector Kit is used at the expense of 1000mm of straight flue run.

TECHNICAL SPECIFICATIONS.

	CODE COMBI ES 26	CODE COMBI ES 33	CODE COMBI ES 38
Height mm		830	
Width mm		395	
Depth mm		278	
Weight (packaged) kg	41.3	41.4	41.6
Max installation weight kg	35.9	36.0	36.2
CH output (kW) min/max @ 70°C	4.8 - 24.2	6.1 - 24.2	7.1 - 24.2
CH output (kW) min/max @ 40°C	5.1 - 25.6	6.4 - 25.6	7.5 - 25.6
DHW output (kW) max	26.1	32.7	38.2
DHW flow rate l/min. 35°C rise	10.7	13.4	15.7
SEDBUK rating (2005) %	91	91.1	91
SEDBUK rating (2009) %	89.0	89.0	88.9
NOx classification		CLASS 5	
Adjustable to LPG	No	No	Yes